

shaftless

1100 mm

max 800 - min 400 mm

250/300 mt/min

Gas - thermo-fluid


max 800 mm

1100



MAIN CHARACTERISTICS:

- Web passage width: \geqslant
- Circumference: \triangleright
- Max working speed with 100% coverage: \triangleright
- Reel diameter:
- Air heating:
- AAAA Loading of printing cylinder with truck
- Front pneumatic pressure roller sleeve extraction
- Check of the in-feeding and out-driving power
- Machine delivered with entry and exit web guides, ink fountains with pumps and viscometers
- Automatic unwinder with dual-sense change
- \triangleright Automatic rewinder
- In-line trimming
- **Customization on request**
 - Vertical double-turret automatic rewinder with clutched shafts and in-line cutting (min. 150 mm)

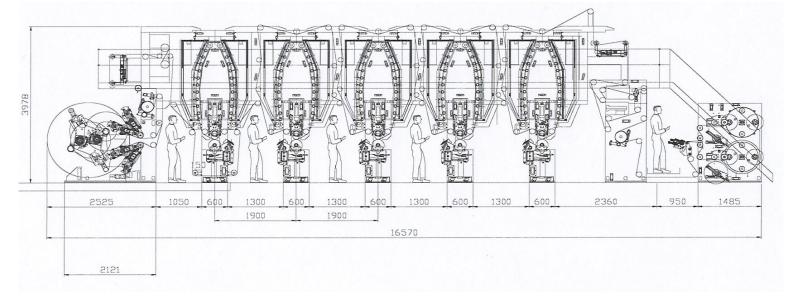

R.C.L. S.r.I. – Str. Prov. Casale Altavilla, 30 15030 Terruggia AL (Italy) Mobile 00393483828048 A giorcelli.b@rclsrl.it A www.rclsrl.it