


# **AUTOMATIC REWINDER**

## **For tubular materials (sliver)**

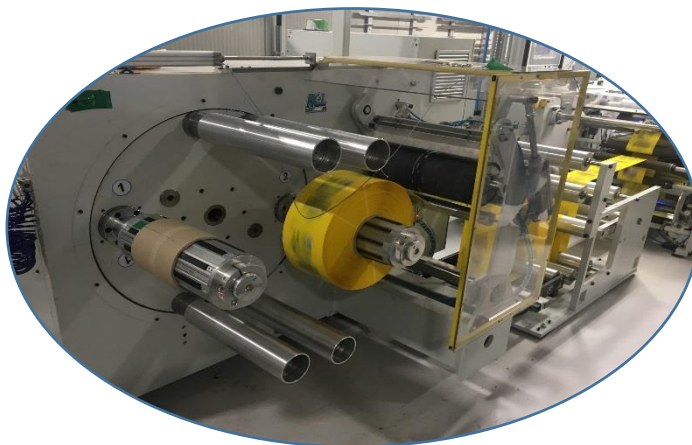

### **MAIN CHARACTERISTICS:**

- |  |                |
|--|----------------|
| ➤ Max width:   | 350 mm         |
| ➤ Min width:   | 15 mm          |
| ➤ Reel max diameter:                                 | 500            |
| ➤ Core expected diameters:                           | 76-127-150-254 |
| ➤ Max speed:   | 250 mt/min     |
| ➤ Spline speed (depending on the processed product): | 250 mt/min     |
| ➤ Settable driving force:                            | 3-15 Kg        |
| ➤ Settable coiling:                                  | ± 30 mm        |
| ➤ Installed power:                                   | 15 Kw          |
| ➤ Air pressure:                                      | 6 bar          |

